



Dimensions

Unit: mm


RWB-250K

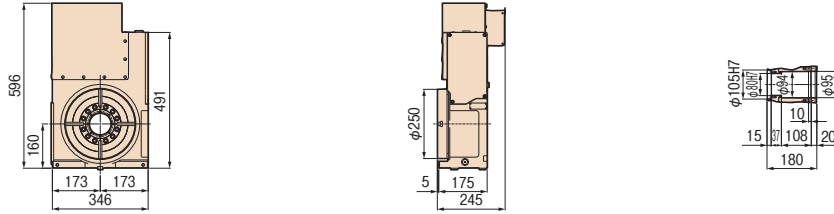


RWB-320K

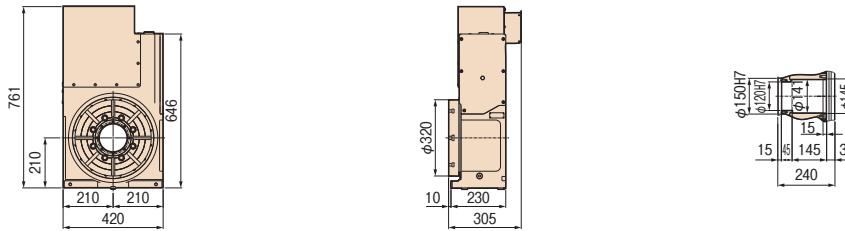


RWB-400K

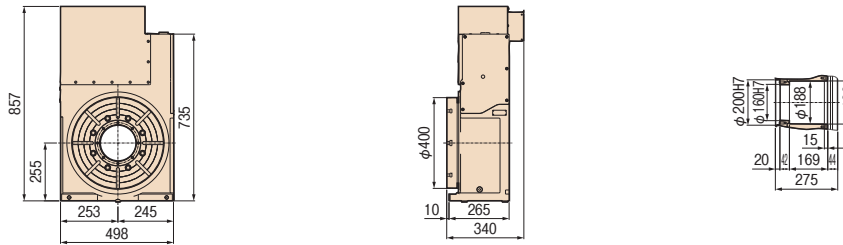

RWB-500K

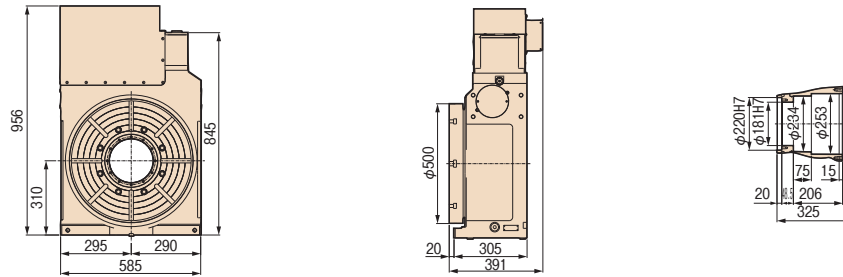

RNCK-631

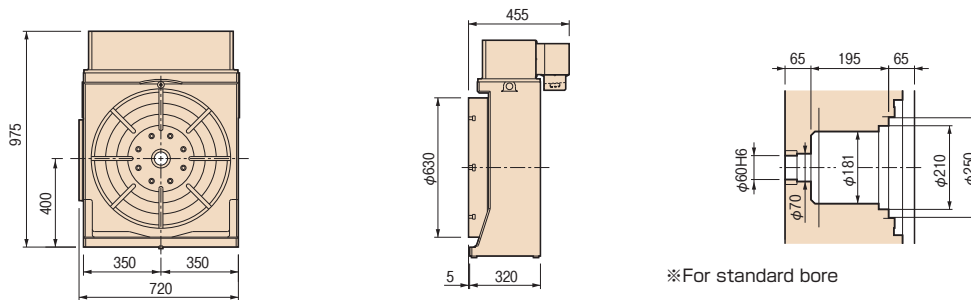


Clamping block and bolt


	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RWB-250K	I	4	50~125	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RWB-320K	I	4	73~162	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-400K	I	4	73~160	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-500K	I	4	73~200	18	40	20	110	18	42	50	25	21	11	70	46	28	16
RNCK-631	II	4	100~255	18	40	18	63	18	15	30	58	21	11	105	60	28	16

Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Type I

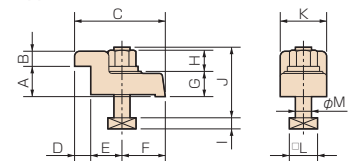

Type II

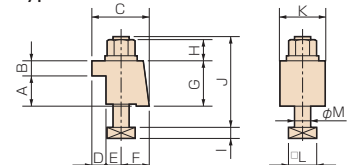

RBS

TBS

RWE/RWA
RN

RWE/RWA-B
RNCV-B

RNCM

RWB

**RWB-K
RNCK**

RCH

RNC

RCV
RNCV

Multi-Spindle
RN-N

TWA/TN

TTNC

THNC

Multi-Spindle
TTNC-N

RDS

RTV

RTT

RCB

NC Controllers

Accessories

Options

Technical
Information