



Dimensions

Unit: mm


RWB-250R

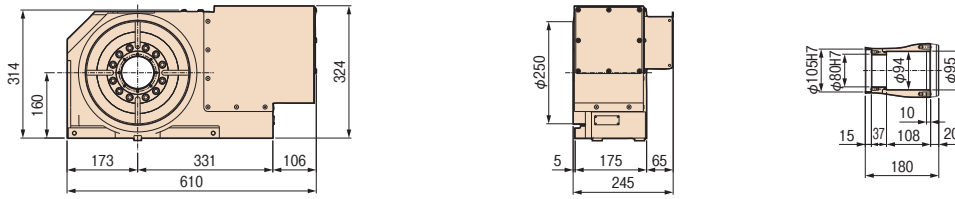


RWB-320R

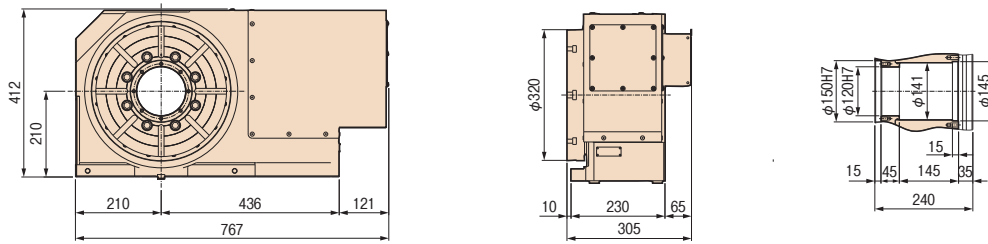

RWB-400R

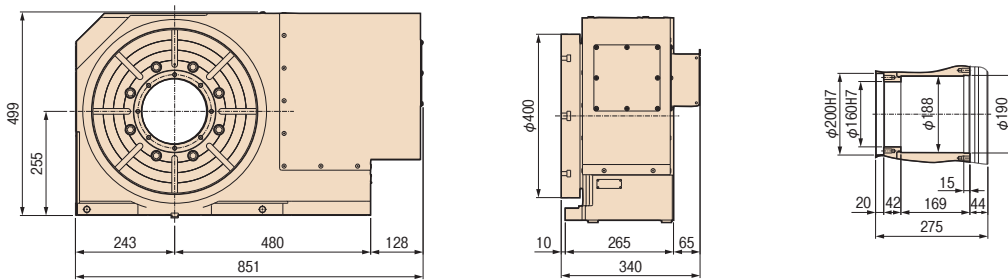

RWB-500R

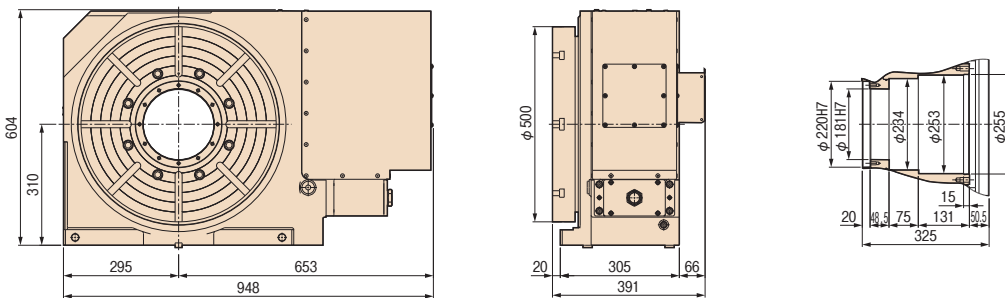

Note: The above dimensions are for FANUC servo motors. The dimensions of servo motors of other manufacturers may be larger.

RBS

TBS

RWE/RWA  
RN

RWE/RWA-B  
RNCV-B

RNCM

RWB

RWB-K  
RNCK

RCH  
RNC

RCV  
RNCV

Multi-Spindle  
RN-N

TWA/TN

TTNC

THNC

Multi-Spindle  
TTNC-N

RDS

RTV  
RTT

RCB

NC Controllers

Accessories

Options

Technical  
Information

Clamping block and bolt

Unit: mm

	Type	Q'ty	T-slot pitch	T-slot width	A	B	C	D	E	F	G	H	I	J	K	L	M
RWB-250	I	4	50~125	18	25	12	80	12	33	35	22	21	11	65	40	28	16
RWB-320	I	4	73~162	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-400	I	4	73~193	18	30	15	90	16	31	43	25	21	11	70	46	28	16
RWB-500	I	4	73~233	18	40	20	110	18	42	50	25	21	11	70	46	28	16

Note: When using a machine with a T-slot pitch other than the above, use suitable clamping blocks and bolts that are available on the market, or order custom-made ones from TSUDAKOMA. (Option)

Type I

